



ISHIDA

ISHIDA CO., LTD.

Distributed by:
Interweigh Systems Inc.
Phone: 800-268-3269
e-mail: inquiry@interweigh.ca
www.interweighsystems.ca


Design and specifications are subject to change without notice.

Printed in Japan 0606 (IW) IL2000SA

ISHIDA

Retail Scale Register




Uni-7



Yes, we are...
UNIVERSAL.

Touch the future of scale technology.

Seven Questions & Answers

- 1 Do you need effective advertising that attracts the eyes of customers from a distance?**
The UNI-7 is equipped with a high-quality color LCD. The repeated display of a wide range of advertising screens on the UNI-7 stimulates the customer's willingness to buy, so you can expect an increase in sales.

- 2 Do you receive complaints from customers about differences between listed prices and prices registered by the POS system?**
The UNI-7 can perform real-time communication with the host computer via optional wireless LAN, enabling you to change unit prices and change or abolish products even during operation.

- 3 Do you often make input errors because it is difficult to hear the key entry sounds?**
The UNI-7 is equipped with the industry's first vibration function, which provides clear tactile feedback to your fingertips with each key entry. Your quicker response time will reduce customer wait time.


- 4 Do you want to increase your sales through cross merchandising?**
The compact, low-profile UNI-7 uses a front cassette loading method, freeing up more counter space for displaying related products and making it easier to replace labels. Cross merchandising becomes more effective when using coupon labels.




- 5 Do operators and customers with various ethnic backgrounds require you to use multiple languages?**
With the UNI-7, you can pre-select one of five languages listed on the selection screen. In the parameter settings, you can also select two languages to be printed at the same time, providing your customers with easy-to-follow displays and printing. The UNI-7 offers universal functions for increasing target customers and supporting global deployment.

- 6 Are you looking for new ideas to differentiate your stores from those of your competitors?**
You can pull in more customers by inviting popular tenants or setting up stimulating store environments, because the UNI-7 can issue receipts as well as labels. With a quick automatic cutter (available for the elevator type) equipped with a receipt fall prevention function, the UNI-7 supports your speedy operations.

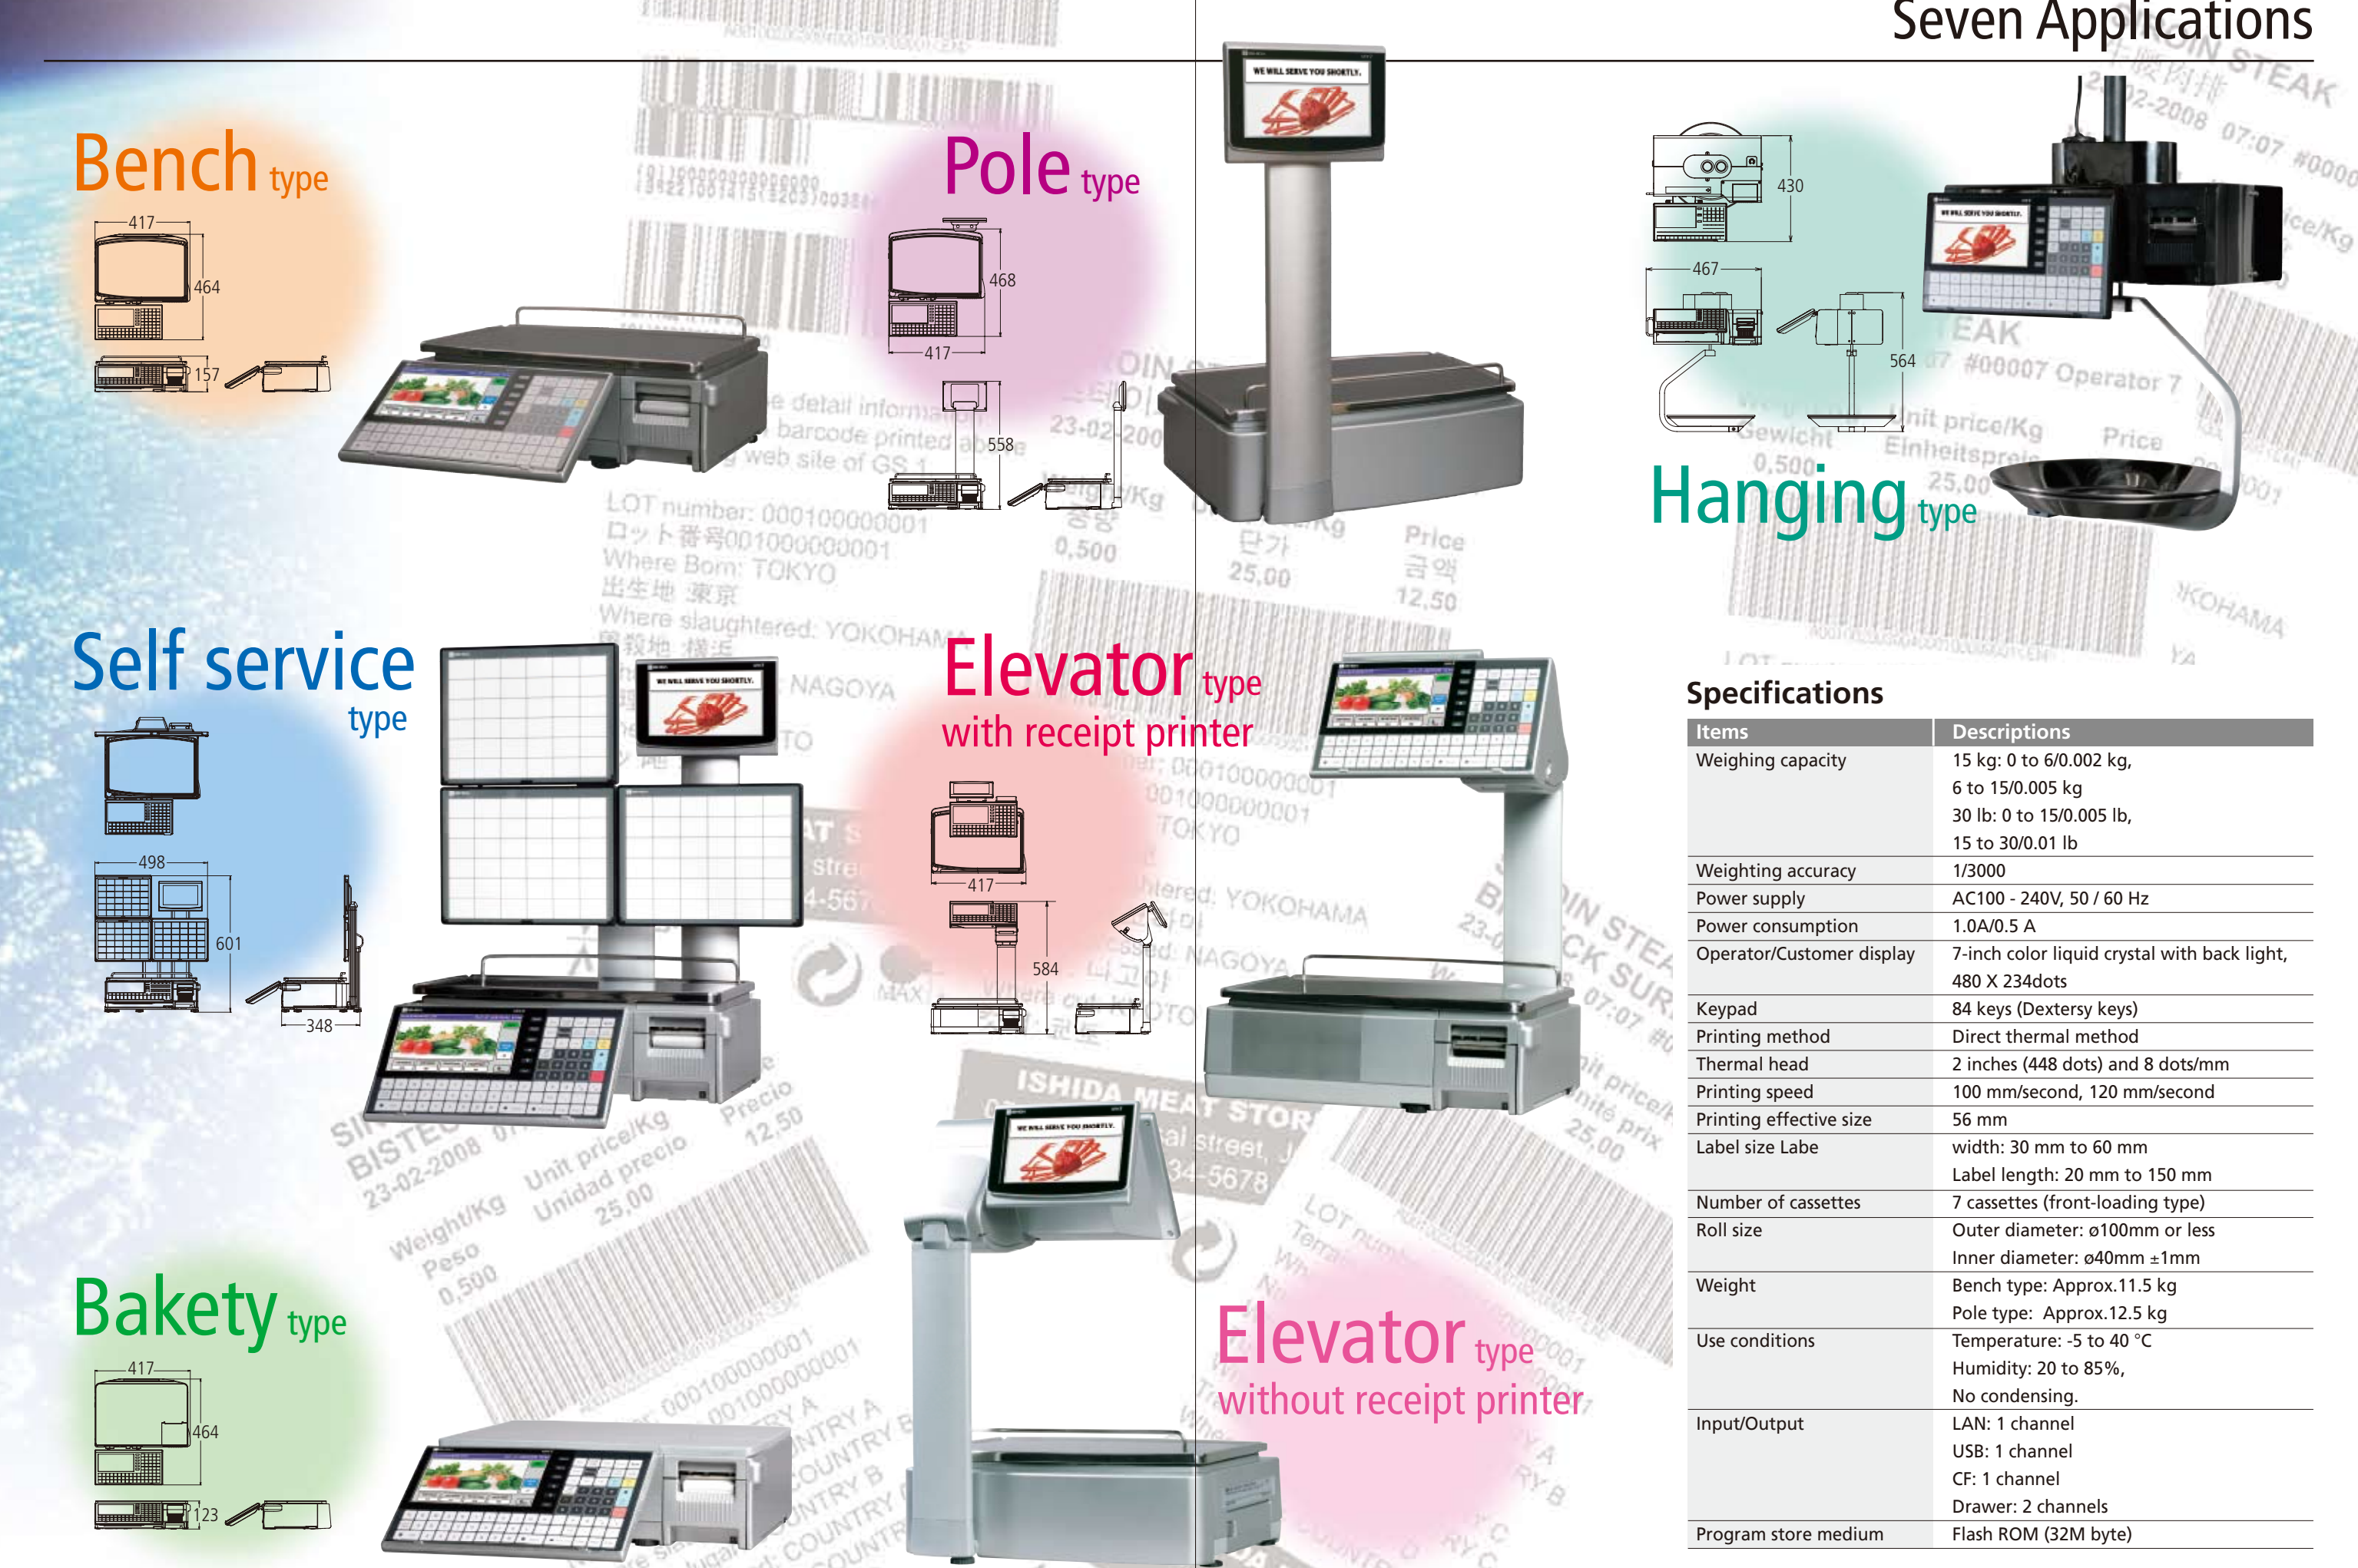
- 7 Are you looking for an appealing method for visualizing food safety and security?**
The UNI-7 memory can be expanded to up to 2GB, allowing you to appeal to your customers with visual information such as logos, messages, and data on traceability, ingredients and nutrition, which will be printed on labels. The UNI-7 is a tool that strengthens the credibility of your stores.


Touch the future of scale technology.

Seven Questions & Answers

- 1 Do you need effective advertising that attracts the eyes of customers from a distance?**
The UNI-7 is equipped with a high-quality color LCD. The repeated display of a wide range of advertising screens on the UNI-7 stimulates the customer's willingness to buy, so you can expect an increase in sales.

- 2 Do you receive complaints from customers about differences between listed prices and prices registered by the POS system?**
The UNI-7 can perform real-time communication with the host computer via optional wireless LAN, enabling you to change unit prices and change or abolish products even during operation.

- 3 Do you often make input errors because it is difficult to hear the key entry sounds?**
The UNI-7 is equipped with the industry's first vibration function, which provides clear tactile feedback to your fingertips with each key entry. Your quicker response time will reduce customer wait time.


Seven Applications



Specifications

Items	Descriptions
Weighting capacity	15 kg: 0 to 60.002 kg, 6 to 150.005 kg 30 lb: 0 to 150.005 lb, 15 to 300.01 lb
Weighting accuracy	1/3000
Power supply	AC100 - 240V, 50 / 60 Hz
Power consumption	1.0A/0.5 A
Operator/Customer display	7-inch color liquid crystal with back light, 480 X 234dots
Keypad	84 keys (Dextersy keys)
Printing method	Direct thermal method
Thermal head	2 inches (448 dots) and 8 dots/mm
Printing speed	100 mm/second, 120 mm/second
Printing effective size	56 mm
Label size Label	width: 30 mm to 60 mm Label length: 20 mm to 150 mm
Number of cassettes	7 cassettes (front-loading type)
Roll size	Outer diameter: ø100mm or less Inner diameter: ø40mm ±1mm
Weight	Bench type: Approx.11.5 kg Pole type: Approx.12.5 kg
Use conditions	Temperature: -5 to 40 °C Humidity: 20 to 85%, No condensing
Input/Output	LAN: 1 channel USB: 1 channel CF: 1 channel Drawer: 2 channels
Program store medium	Flash ROM (32M byte)