

Now Includes:  
5 Year Parts & Lightning  
Protection Warranty

## SURVIVOR® OTR

Flattop Truck Scale - Steel Deck




### STANDARD FEATURES

Product Bundles  
NOW Available!


- Top access to load cells and junction box
- 75,000lb capacity load cells and G-Force™ mount assemblies
- Junction box(es) appropriate for number of load cells utilized
- NTEP Certified, CC #02-003A1
- 90,000lb Concentrated Load Capacity (CLC)
- 90,000lb Dual Tandem Axle (DTA)
- Up to 270,000lb full scale capacity
- Span deflection ratio (1:1100) for legal highway loads
- Three standard widths: 10ft, 11ft, and 12ft (available up to 14ft, NTEP Certified)

**Package includes:** Assembled weighbridge modules and weighbridge fasteners; load cells with conduit fitting; load cell mounts with leveling bolts and anchor bolts; copper transient bypass cables at each load cell; metal conduit on weighbridge for load cell cable runs; flexible plastic conduit from load cell to metal conduit; conduit fittings from plastic to metal conduit; FRP junction box(es); homerun cable to indicator (60ft long) and print packages including foundation drawing (pier, floating slab or pit) and installation manual.

**Package does not include:** Approach coping; foundation alignment posts; rebar and mesh for foundation; indicator; printer; freight charges including material handling; shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.



Optional bolt-on guiderails

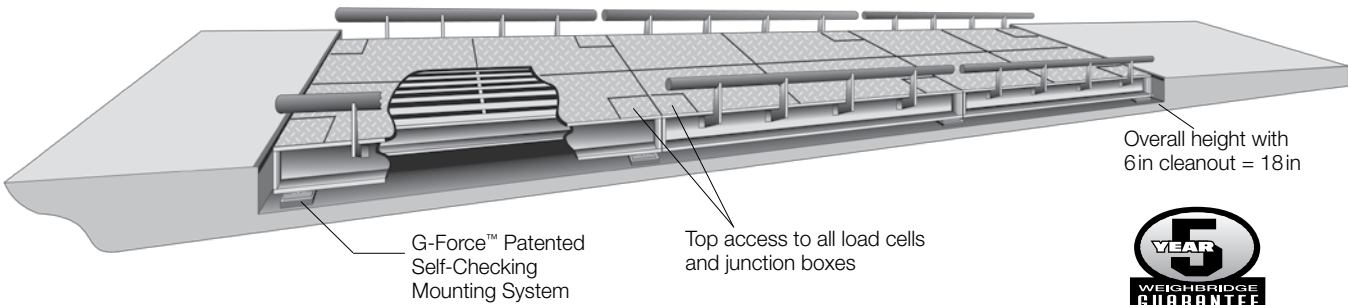

G-Force™ Patented Self-Checking Mounting System

Top access to all load cells and junction boxes

Overall height with 6 in cleanout = 18 in



### APPROVALS



**SURVIVOR**  
Durable performance  
measured not in  
years, but decades.

### SPECIFICATIONS

#### LOAD CELLS AND MOUNT ASSEMBLIES:

75,000lb capacity; G-Force™ Patented Self-Checking Mounting System, top access to load cells

#### FULL SCALE CAPACITY:

Up to 270,000lb

#### DEFLECTION FACTOR:

1:1100

#### CONCENTRATED LOAD CAPACITY (CLC):

90,000lb

#### DUAL TANDEM AXLE (DTA):

90,000lb

#### APPROVALS:

NTEP Certified per H-44, Class III, CC #02-003A1

#### WARRANTY:

Five-year limited warranty on the weighbridge  
Five-year parts warranty, including lightning protection (please refer to Warranty Statement on page HC-16)

Five-year lightning extended warranty (see page HC-16)

**DUE TO THE VARIETY OF CONFIGURATIONS, PLEASE CONSULT THE FACTORY TO DISCUSS APPLICATION REQUIREMENTS AND FOR COMPLETE SPECIFICATIONS AND PRICE QUOTATIONS.**